



### Electrical

#### ELECTRICAL SPECIFICATIONS AT 25°C

INPUT VOLTAGE	: 10.2 – 15.75 VDC
INPUT CURRENT	: 330mA MAX
OUTPUT VOLTAGE	: 9.0 ±0.45VDC
OUTPUT CURRENT	: 80mA MIN – 225mA MAX
OUTPUT RIPPLE (20MHz BW)	: 100mV P-P MAX
SHORT CIRCUIT PROTECTION	: CONTINUOUS
OPERATING TEMP RANGE	: 0° TO 70°C
STORAGE TEMP RANGE	: -40° TO 105°C
HI POT	: 2000VRMS
EFFICIENCY	: 70% MIN AT 12V IN AND 225mA LOAD
REMOTE ON/OFF	: > 2.0V, 0.2mA MAX    OFF @ 12Vin AND 225mA LOAD
	: NO CONNECTION        ON @ 12Vin AND 225mA LOAD
	: < 0.8V, -0.4mA MAX    ON @ 12Vin AND 225mA LOAD

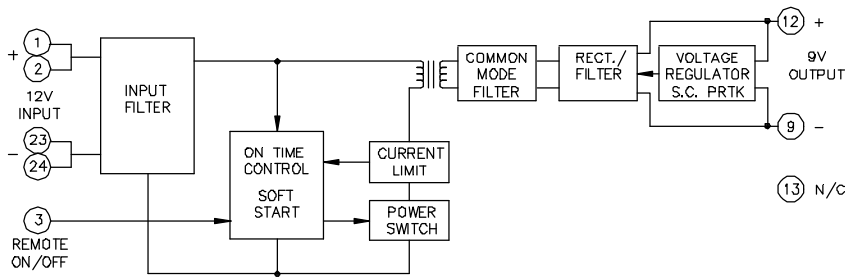

### Mechanical

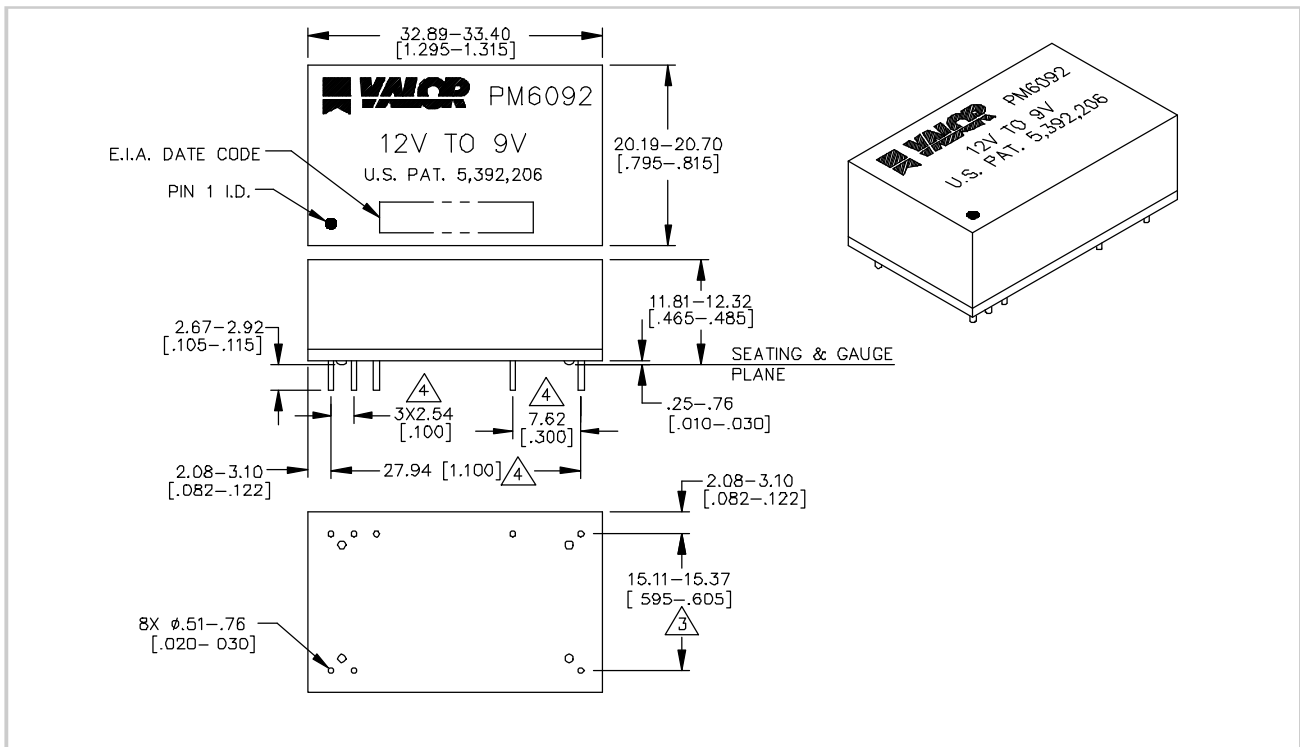

WEBSITE [www.valorinc.com](http://www.valorinc.com) E-MAIL [marketing@valorinc.com](mailto:marketing@valorinc.com)

**NORTH AMERICA**  
tel 1-800-31 VALOR  
fax 619-537-2525

**ASIA/PACIFIC**  
tel +852-2953-1000  
fax +852-2953-1333

**EUROPE**  
tel +44-1727-824 875  
fax +44-1727-824 898